

Effect of kinds of gas on gas holdup in bubble columns

Fukuji Yamashita and Tatsuma Fukaura
Dept. of Applied Chemistry, Kanagawa Institute of Technology
Atsugi, 243-0292, Japan

The effect of kinds of gas on gas holdup E_G in bubble columns was studied. E_G increased with increasing density of gas. This reason was explained as follows: Small bubbles easily generate in a heavy gas according to breakup of bubbles, because the dynamic pressure ($\rho_G U^2/2$) in bubbles is large in heavy gas. Therefore, the quantity, or number of small bubbles for heavy gas becomes much larger than that for light gas and E_G increases with increasing density of gas.

1. Introduction

Bubble columns are widely used as bioreactors and gas-liquid reactors. Gas holdup E_G is a very important parameter for design and scale-up of bubble columns. Therefore, there have been many studies about gas holdup in bubble columns. It has been reported that gas holdup depends on many factors such as gas and liquid velocity, physical property of gas and liquid, type and arrangement of gas spargers, gas inlet height and inclination angle of bubble columns. However, the effect of kinds of gas on E_G is not yet clear. In this work, the effect of kinds of gas on E_G was experimentally studied and the results were discussed and analyzed.

2. Previous study

Akita and Yoshida (1973) have reported that E_G does not depend on kinds of gas in a 15cm square bubble column with 4.5 mm orifice, although the gas holdup with He gas appears slightly lower at higher gas velocities. They used Air, O₂, He, CO₂ / water system. Hikita et al. (1980) studied the effect of gas and liquid properties on gas holdup in the bubble column of 10 cm inner diameter and 1.5 m height. They have reported that E_G depends on $\rho_G^{0.062} \rho_L^{0.069} \mu_G^{0.107} \mu_L^{-0.053}$ and presented the following correlation:

$$E_G = 0.672 (U_G \mu_L / \gamma)^{0.578} [\mu_L^4 g / (\rho_L \gamma^3)]^{-0.131} (\rho_G / \rho_L)^{0.062} (\mu_G / \mu_L)^{0.107} \quad (1)$$

Koetsier and Van Swaaij (1976) studied the effect of kinds of gas on E_G in a bubble column with a porous gas sparger. In pure water system, E_G for N₂ gas is much larger than that for He gas. However, in 0.6 mol/dm³ NaCl aqueous solution, E_G for N₂ gas is nearly equal to that for He gas. They have concluded that bubbles for He gas coalesced

into larger ones much easier than those for N_2 gas and rise faster in the pure water system and that E_G for He gas is much lower than that for N_2 gas. Ozturk et al. (1987) have also studied the effect of kinds of gas on E_G in the 9.5 cm I.D. and 85 cm tall bubble column with organic liquids and reported that E_G depends on kinds of gas. They have concluded that the gas-specific effects are probably related to the bubble formation at the sparger rather than the hydrodynamics in the bulk of the dispersion. Therefore, E_G depends on kinds of gas in bubble columns with small height ($H_T < 1$ m), however, E_G does not depend on kinds of gas in tall bubble columns ($H_T > 2$ m). H_T means a bubbling height.

3. Experimental

One circular and three rectangular bubble columns were used. They were all made of transparent acrylic resin. The cross sections of three rectangular bubble columns were 1 cm x 30 cm, 3 cm x 20 cm and 5 cm x 10 cm, in order. The circular bubble column has 8 cm inner diameter and 165 cm height. A single nozzle and perforated plates were used as a gas sparger. H_2 , He, Ar, O_2 , CO_2 and HFC-134a gas from cylinders were used as a gas. Most of flow rate of gases were controlled by the mass flow controller made by Alicat, USA. Some flow rate of gases were measured by commercial flow meter (Omega, Japan). Tap water was used as a liquid. Liquid was used in a batch. All runs were conducted at room temperature. Average gas holdup E_G was measured visually, or by a photographic method. When the effect of kinds of gas on frequency and volume of bubbles which generated from a single nozzle was studied, single horizontal 7 and 10 mm I.D. glass tubes were used as a nozzle. The nozzles were set on a bottom of a rectangular water bath at room temperature. The water bath was 16 cm wide, 29 cm deep and 21 cm high. Water depth was 15 cm. Frequency of bubbles and gas flow rate were measured by the electric resistance probe and mass flow controller, respectively.

4. Experimental results and discussions

4.1 Effect of kinds of gas on frequency N of bubbles generated from a single nozzle

Figs.1 and 2 show the effect of kinds of gas on frequency N of bubbles which generated from horizontal $d = 7$ mm and 10 mm single nozzle, respectively. It is clear from these figures that frequency N and volume V of bubbles which generate from single nozzles do not depend on kinds of gas.

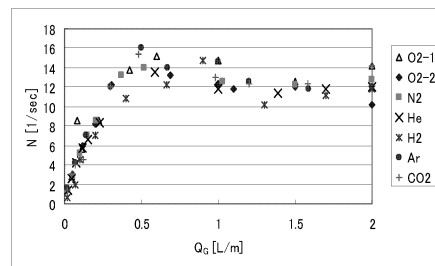


Fig.1 N vs. Q_G for 7 mm I.D. nozzle

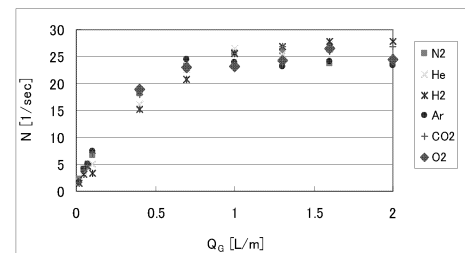


Fig.2 N vs. Q_G for 10 mm I.D. nozzle

4.2 E_G for tap water

Figs.3-5 show E_G for various bubble columns. Fig.3 shows E_G for the 5 x10 cm rectangular bubble column whose gas sparger was a perforated plate ($d = 0.5\text{mm}$, $n=18$, $p = 10\text{ mm}$). Fig.4 shows E_G for the 1cm x 30 cm rectangular bubble column whose gas sparger was a single orifice ($d = 1\text{ mm}$). Fig.5 shows E_G for the 8cm I.D. bubble column whose gas sparger was a single nozzle ($d = 6\text{ mm}$). It is clear from these figures that E_G increases with density of gas.

Fig.6 shows the cross sectional area of maximum bubbles for the 1 x 30cm bubble column whose gas sparger was a single orifice ($d = 1\text{ mm}$). The cross sectional area of bubbles was measured by a photographic method. It is clear from this figure that the cross sectional area of maximum bubbles do not depend on kinds of gas.

Fig.7 shows the flow conditions of bubbles in the 5cm x 10cm rectangular bubble column. It is clear that the number, or quantity of bubbles for oxygen – tap water are much larger than that for He – tap water system at nearly the same U_G .

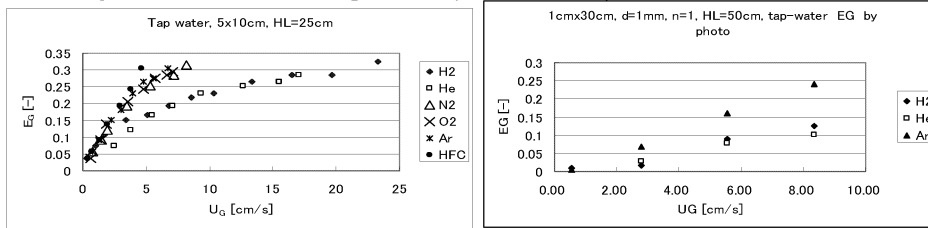


Fig.3 E_G vs. U_G for the 5 x 10 cm column Fig.4 E_G vs. U_G for the 1 x 30 cm column

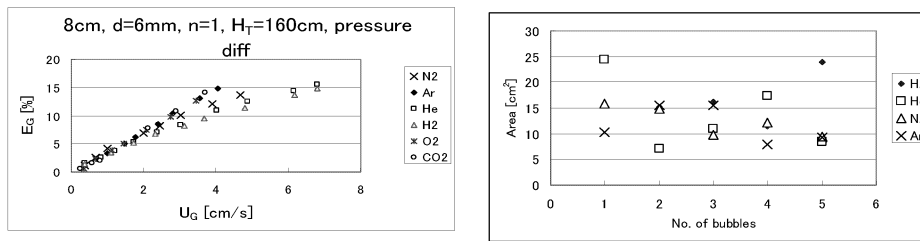


Fig.5 E_G vs. U_G for 8 cm I.D. column

Fig.6 Area of maximum bubbles

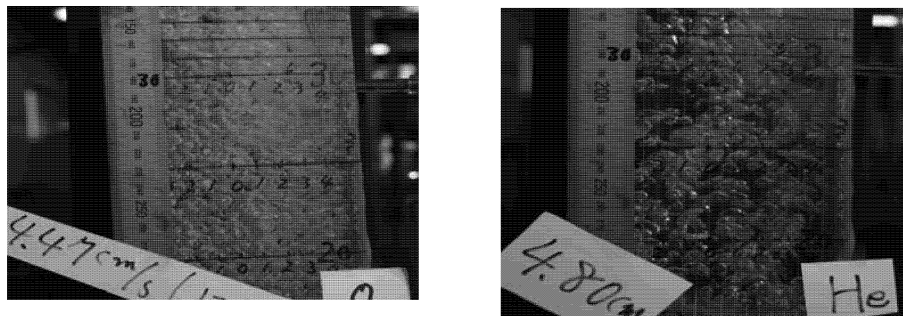


Fig.7 Photos of bubbles in the 5 x 10 cm rectangular bubble column in the range of $h = 20\text{-}30\text{cm}$.. Left: oxygen – tap water at $U_G = 4.47\text{ cm/s}$. Right: He-tap water at $U_G = 4.80\text{ cm/s}$.

Figs.8 and 9 show rising bubbles of Ar gas which generated from a 3mm I.D. single nozzle at $U_G = 1.4$ and 2.8 cm/s in the 1cm x 30cm bubble column, respectively. The number, or quantity of small bubbles increases with height from the nozzle according to bubble breakup.

From these findings, it is concluded that the effects of kinds of gas on E_G are caused by the difference of number, or quantity of small bubbles. It is known that bubbles tend to break when dynamic pressure ($\rho_G U^2/2$) in a bubble is large (Levich, 1962). Therefore, the number, or quantity of small bubbles increases with increasing density of gas.

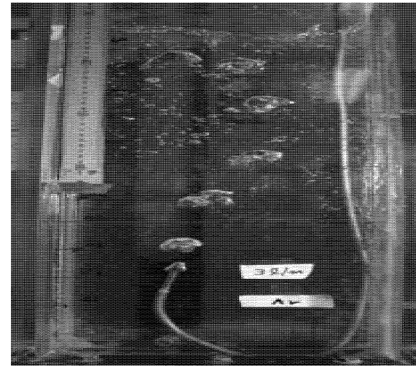


Fig.8 Flow conditions of Ar bubbles at $U_G = 2.8$ cm/s and $h = 20-60$ cm Fig.9 Flow conditions of Ar bubbles at $U_G = 1.4$ cm/s and $h = 0-60$ cm

4.3 E_G for NaCl aqueous solution

Fig. 10 shows the effect of kinds of gas on E_G for 0.6M NaCl aqueous solution in the 5 cm x 10 cm bubble column at $H_L=25$ cm. The experimental conditions are the same as those in Fig.3 except NaCl aqueous solution. E_G in 0.6 M NaCl aqueous solution increased about 20% than that in tap water (see Fig.3) because of addition of NaCl. E_G depended remarkably on kinds of gas. However, Koetsier and Van Swaaij (1976) have reported that E_G does not depend on kinds of gas in 0.6 M NaCl aqueous solution, because coalescence of bubbles at the porous gas sparger is prohibited by 0.6 M NaCl aqueous solution. The reason why their results are different from the results in this work may be derived from the facts that they used a porous plate as a gas sparger and that E_G depended mainly upon bubble coalescence at the gas sparger. It is thought that in this work E_G depended mainly upon bubble breakup.

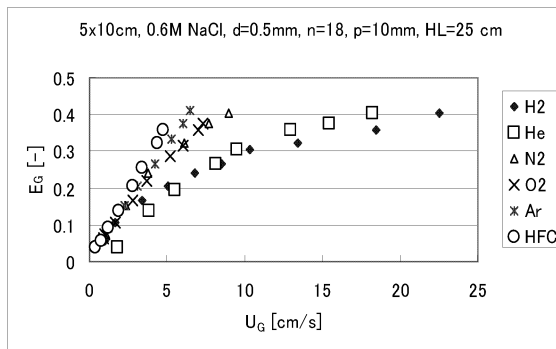


Fig.10 E_G vs. U_G for 0.6M NaCl solution in the 5 x 10 cm bubble column with perforated plate as a gas sprayer.

Ozturk et al. (1987) have concluded that the gas-specific effects are probably related to the bubble formation at the sparger rather than the hydrodynamics in the bulk of the dispersion. Therefore, E_G depends on kinds of gas in bubble columns with small height ($H_T < 1$ m), however, E_G does not depend on kinds of gas in tall bubble columns ($H_T > 2$ m). Their conclusion cannot be verified because H_T was less than 2 m in this work.

5. Conclusion

- 1) E_G increased with increasing density of gas. This reason was explained as follows: Small bubbles easily generate in a heavy gas according to breakup of bubbles because the dynamic pressure ($\rho_G U^2/2$) in bubbles is large in heavy gas. Therefore, the quantity, or number of small bubbles for heavy gas becomes much larger than that for light gas and E_G increases with increasing density of gas.
- 2) The number of bubbles which generated from single nozzles did not depend on density of gas.
- 3) The cross sectional area of maximum bubbles did not depend on kinds of gas in the 1cm x 30 cm bubble column.
- 4) E_G for 0.6M NaCl aqueous solution increased with increasing density of gas.
- 5) The quantity, or number of small bubbles increased with height from the single nozzle.

Nomenclature

d = diameter of hole [m]

E_G = gas holdup [-]

H_L = height of clear liquid [m]

H_T = height of bubbling layer [m]

n = number of holes [-]

N = number of bubbles [-]

p = pitch of holes [m]

Q_G = gas flow rate [m³/min]

U = velocity [m/s]

U_G = velocity of gas [m/s]

ρ_G = density of gas [kg/m³]

ρ_L = density of liquid [kg/m³]

μ_G = viscosity of gas [Pa·s]

μ_L = viscosity of liquid [Pa·s]

γ = surface tension of liquid [N/m]

References

- Akita, K., Yoshida F., 1973, Gas holdup and volumetric mass transfer coefficient in bubble columns. *Industrial Engineering Chemistry Process Design Development*, 12, 76-80.
- Bhaga, D., Pruden, B. B., Weber, M. E., 1971, Gas holdup in a bubble column containing organic liquid mixture. *The Canadian Journal of Chemical Engineering*, 49, 417-420.
- Hikita, H., Asai, S., Tanigawa, K., Segawa, K., Kitano, M., 1980, Gas holdup in bubble columns. *The Chemical Engineering Journal*, 20, 59-67
- Koetsier, W. T., Van Swaaij, W. P. M., 1976, Maximum gas holdup in bubble columns. *Journal of Chemical Engineering of Japan*, 9, 332-333.
- Ozturk, S. S., Schumpe, A., Deckwer, W. -D., 1987, Organic liquids in a bubble column: Gas hold-ups and mass transfer coefficients. *AIChE Journal*, 33, 1473-1480.
- Levich, Veniamin G., 1962, *Physicochemical Hydrodynamics*, P. 452-454. Prentice-Hall, Inc